



Test  
TS EN ISO/IEC 17025  
AB-0716-T

AB-0716-T

TURT240115194\_  
REVISED01

10-24

## TEST REPORT

Page 1 of 6

**REPORT NUMBER :** TURT240115194\_REVISED01

**APPLICANT NAME**

**ADDRESS**

**BUYER**

TEXDECOR

**SAMPLE DESCRIPTION :**

One sample of beige woven fabric

**DATE IN :**

3 October ,2024 ( 11:10)

**RESUBMIT DATE :**

9 October ,2024

**DATE OUT :**

21 October ,2024 / 22 October ,2024

**FABRIC WEIGHT :**

Claimed to be 260 g/m<sup>2</sup>

**FABRIC NAME :**

KNOKKE 3290

**MODEL/STYLE NO :**

**REFERENCE :**

**FIBER COMPOSITION :**

Claimed to be 55%RF 45%FR

**PROVIDED CARE LABEL :**

Not Given

**NOTE:**

Test methods were given by the applicant.

Pass/Fail statements were made based on applicants submitted requirements.

Nermin GÜLER  
Customer Care Executive

Durmuş UĞURLU  
Textile Laboratory Manager

Intertek Test Hizmetleri A.S.  
Merkez Mahallesi Sanayi Cad. No.23 Altindag Plaza Yenibosna 34197 - ISTANBUL / TURKEY  
Phone : +90.212. 496 46 46 Fax: +90.212. 452 80 55  
e-mail : [intertekcg.turkiye@intertek.com](mailto:intertekcg.turkiye@intertek.com)  
<http://www.intertek-turkey.com>



240115194\_REVISED01

RESULTS  
REPORT :TURT240115194\_REVISED01

Page 2 of 6  
22 October, 2024

Test Method	Result	Requirements
		SAMPLE
TEST		1
Flammability(±)		P
Flammability- IMO FTP Code (2010) (±)		P

In this revised 01 report,Buyer name and Fabric Name were added by the request of the applicant.  
This report replaces the report no TURT240115194 dated on 21 October,2024 and must be used instead of it.  
Report no TURT240115194 dated 21 October,2024 is invalid.

P = MEETS BUYER' S REQUIREMENT / F = DOES NOT MEET BUYER' S REQUIREMENT / NR = NO REQUIREMENT /  
SC=STILL CONTINUES / X=NOT PERFORMED / NA = NOT APPLICABLE / LS = LACK OF SAMPLE /  
NC = NO COMMENT / I = INCONCLUSIVE / # = SEE RESULT / NF = NEEDS FURTHER TESTING / A = ABSENT /  
M = MARGINAL ACCEPT / SD = SEE DETAILS ENCLOSED / FS: FURTHER STEPS / SR = SEE RESULT / MA = MINIMUM AMOUNT

This report (including any enclosures and attachments) are prepared for the exclusive use of the Customer(s) named in the report and solely for the purpose for which it is provided and on the basis of instructions and information and/or materials supplied by Intertek's Customer. The test results relate only to the specific items tested and are not intended to be a recommendation for any particular course of action. Customer is responsible for acting as it sees fit on the basis of such results. Unless Intertek provide express prior written consent, no part of this report should be reproduced, distributed or communicated to any third party, nor could it be used for PR activities. Intertek do not accept any liability if this report is used for an alternative purpose from which it is intended, nor do Intertek owe any duty of care to any third party in respect of this report. Except where explicitly agreed in writing, all work and services performed is governed by Intertek Standard Terms and Conditions of Service which is available on request or can be obtained at <http://www.intertek.com/terms>. Testing reports without signature are not valid. The sample has been provided by the customer and the results apply to the sample as received. Sample information is supplied by the customer. Unless otherwise requested, this laboratory applies shared risk decision rule. Unless otherwise is specified, all Pass or Fail results are given without uncertainty considered. The reported uncertainty is based on a standard uncertainty multiplied by a coverage factor k=2, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with ISO/IEC 17025 and TÜRKAK accreditation requirements. Tests marked (\*) in this test report are not included in the TÜRKAK accreditation schedule for this laboratory. Intertek accredited by TÜRKAK under registration number [AB-0716-T] for [TS EN ISO IEC 17025] as test laboratory. Turkish Accreditation Agency (TURKAK) is a signatory to the European co-operation for Accreditation (EA) Multilateral Agreement (MLA) and to the International Laboratory Accreditation Cooperation (ILAC) Mutual Recognition Arrangement (MRA) for the recognition of test reports.

RESULTS  
REPORT :TURT240115194\_REVISED01

Page 3 of 6  
22 October, 2024

Test Method	Result	Requirements
-------------	--------	--------------

**Flammability Test(‡)**

NFPA 701 METHOD 1 (ORIGINAL)

	Burning of Drippings (Sec)	Weight Before Exposure (Grams)	Weight After Exposure (Grams)	%Weight Loss (%)
Test 1	1	14.95	12.61	15.65
Test 2	0	14.72	12.21	17.05
Test 3	0	14.87	12.33	17.08
Test 4	0	14.93	12.74	14.67
Test 5	1	15.10	12.66	16.16
Test 6	0	15.16	12.69	16.29
Test 7	0	14.99	12.55	16.28
Test 8	1	14.78	12.39	16.17
Test 9	0	14.89	12.77	14.24
Test 10	1	14.77	12.66	14.29
Average				15.79
Std.dev				1.05303377

**Conclusion:** PASS

The Fabric submitted for testing is PASS the flame resistance requirements when tested, as Received, in accordance with the Procedure outlined in the NFPA 701-Method 1

(‡) The test was performed by an approved subcontractor laboratory which is part of the Intertek Group.

RESULTS  
REPORT :TURT240115194\_REVISED01

Page 4 of 6  
22 October, 2024

**Test Method**

**Result**

**Requirements**

**Flammability- IMO FTP Code (2010) (§)**

Annex 1,Part 7:Test for Vertically Orientated Support Textiles and Films

**Additional Information (Annex)**

Name and Address of the Sponsor:	Not stated
Name and Address of the Manufacturer/Supplier (If known):	Not stated
Type of Furniture:	Not stated
Fabric Details –	
Weave/Density/Yarn	Not
count/thickness(mm)/mass(g/m <sup>2</sup> )	stated
Colour & Tone:	Not
	stated
Fire Retardant Treatment:	Not stated

**Test Specification**

Test Method:	IMO FTP Code (2010) Annex 1, Part 7
Ignition Source:	40mm high Propane gas flame
Ignition Type:	Bottom edge ignition (as determined by the pre-test)
Flame Application Time:	15 seconds (as determined by the pre-test)
Sample Size:	220 x 170mm
Side Tested:	Face

**Uncertainty of Measurement**

The uncertainty of measurement has been estimated to be 4.40%

**Pre-treatment / Durability Procedure**

None – At the request of the customer.

**Conditioning**

Prior to Testing:	At least 24 hours in an atmosphere having a temperature of 20 ± 5°C. and a relative humidity of 65 ± 5%
At Time of Testing:	Temperature between 15°C & 30°C. Relative humidity between 20% & 65%

**Test Results**

Report of tests carried out in accordance IMO FTP Code (2010) Annex 1, Part 7.

"The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use."

RESULTS  
REPORT :TURT240115194\_REVISED01

Page 5 of 6  
22 October, 2024

Test Method

Result

Requirements

Sample No./ Direction	Duration of flaming (Secs)	Duration of afterglow (Secs)	Flaming debris	Flame to edge	Hole to edge	Maximum damaged length (mm)		Average Damage Length (mm)
						Horizontal	Vertical	
1. Length ↑	0.0	0.0	No	No	No	23	103	99.4
2. Length ↓	0.0	0.0	No	No	No	25	94	
3. Length ↑	0.0	0.0	No	No	No	18	92	
4. Length ↓	0.0	0.0	No	No	No	18	98	
5. Length ↑	0.0	0.0	No	No	No	27	110	
6. Width →	0.0	0.0	No	No	No	21	102	99.4
7. Width ←	0.0	0.0	No	No	No	23	105	
8. Width →	0.0	0.0	No	No	No	22	107	
9. Width ←	0.0	0.0	No	No	No	24	88	
10. Width →	0.0	0.0	No	No	No	22	95	

(‡) The test was performed by an approved subcontractor laboratory which is part of the Intertek Group.

The client acknowledges and agrees that any services provided and/or reports produced by Intertek are done so within the limits of the scope of work agreed pursuant to the client's specific instructions. This report relates specifically to the sample(s) tested that were drawn and delivered by the client or their nominated third party. Intertek does not make any representation or warranty for any bulk samples or certify the bulk samples received from the client. Furthermore, Intertek does not provide a warranty or verification on the sample(s) representing any specific goods, material and/or shipment and only relate to the sample(s) as received and tested. Intertek have aimed to conduct the review on a diligent and careful basis and we do not accept any liability to you for any loss arising out of or in connection with this report, in contract, tort, by statute or otherwise, except in the event of our gross negligence or wilful misconduct. In no event, will the contents of any reports or any extracts, excerpts or parts of any reports be distributed or published without the prior written consent of Intertek in each instance. Only the client is authorized to permit copying or distribution of this report (and then only in its entirety). Any such third parties to whom this report may be circulated rely on the content of the report solely at their own risk.

The reported expanded uncertainty is based on a standard uncertainty multiplied by a coverage factor of  $k = 2$ , providing a level of confidence of approximately 95 %. Unless otherwise specified all compliance and pass/fail statements are binary simple acceptance based on the tolerance interval and, with the exception of graded methods, a test uncertainty ratio greater (TUR) than 4:1. For graded methods the TUR will drop to as low as 0.5:1 when the tolerance limits are within a grade division of the upper scale limit. The Uncertainty budgets are stated for each Test method, these are for reference, and should be considered when results are on or close to Specification Limits / Requirements and in such cases it should be noted that the risk of false acceptance or rejection may be as high as 50%, for further information please refer to ILAC G8.


RESULTS  
REPORT :TURT240115194\_REVISED01

Page 6 of 6  
22 October, 2024

Test Method

Result

Requirements

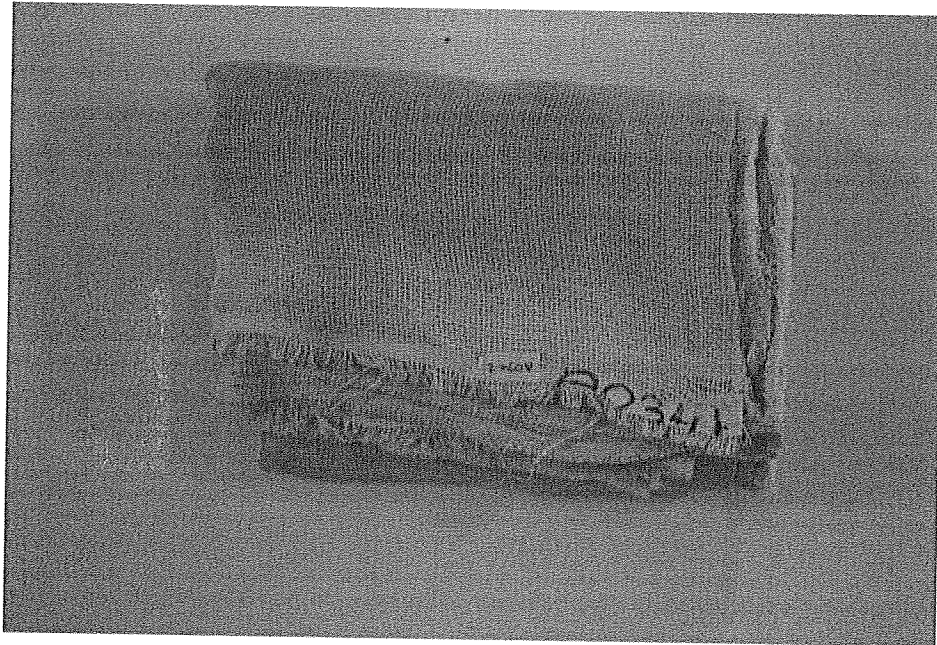

## END OF TEST REPORT ##